


SV-5NM-FCADFR/8030-550PW



5MP High Performance Bullet Camera With Deep Learning-based Image Analysis, Active Deterrence, Starlight Sensor, Dual Light, Object Verification, Face Detection/Recognition, Sound Detection, License Plate Detection/Recognition, 5 - 50mm Motorized Lens (51° - 7°), 80m IR, 30m LED, Built-in Junction Box, Microphone and Speaker.

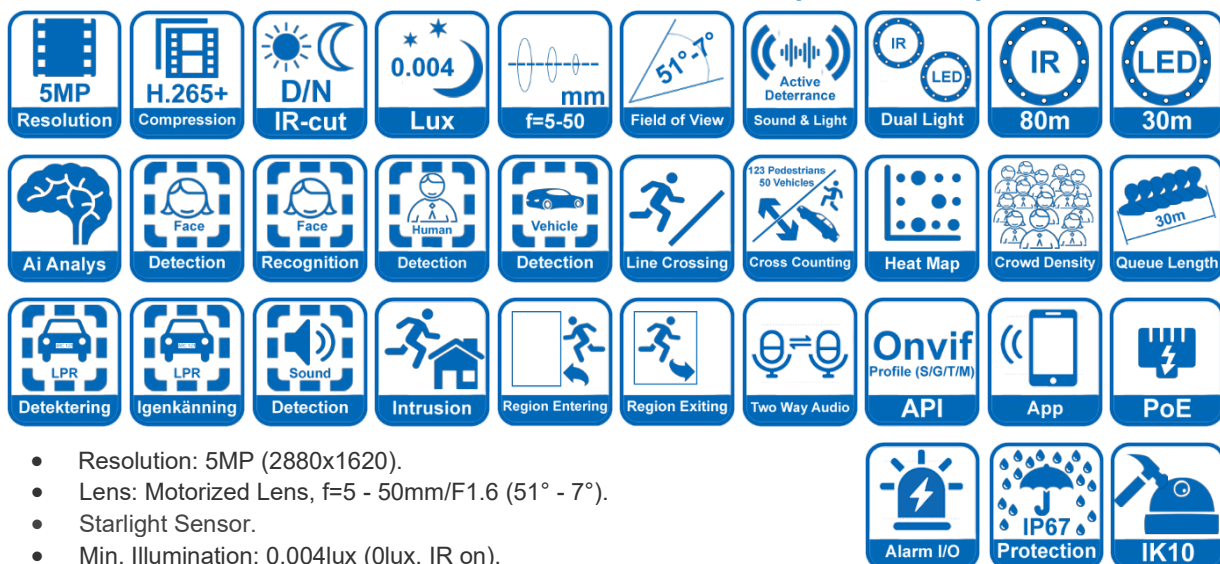

- Resolution: 5MP (2880x1620).
- Lens: Motorized Lens, f=5 - 50mm/F1.6 (51° - 7°).
- Starlight Sensor.
- Min. Illumination: 0.004lux (0lux, IR on).
- Dual Light Sources.
- IR LED, range up to 80m.
- White LED illuminator, range up to 30m.
- 24/7 All-weather Color Images.
- Audio & Light alarm, Active deterrence.
- Two-way audio.
- 1 Audio input + Built-in microphone.
- 1 Audio output + Built-in speaker.
- 1 Alarm input + 1 Alarm output.
- AI Analytics based on deep learning: Face Detection/Recognition, AI Object Classification (Distinguishes Objects Such as Pedestrians and Vehicles) Perimeter Intrusion, Line Crossing, Cross Counting, Heat Map, Crowd Density, Queue Length, License Plate Detection/Recognition, Rare Sound Detection, Intrusion, Object Detection, Region Entrance, Region Exiting.
- Supports backlight compensation, strong light suppression, 3D digital noise reduction, suitable for different video environments.
- MicroSD card support (256Gb).
- ONVIF.
- IP67 Protection.
- Two way power - when connected to a PoE switch, it allows to power the low power receiver from the camera's power socket.

Specifications

IMAGE	
Image Sensor	5MP CMOS sensor 1/2.7" SmartSens
Number of Effective Pixels	2880 (H) x 1620 (V)
Min. Illumination	0.004lux/F1.6 -color mode 0lux (IR på) -B/W mode
Electronic Shutter	Auto/manual: 1/5s ~ 1/20000s
Digital Slow Shutter (DSS)	Up to 1/5s
Wide Dynamic Range (WDR)	Yes (double scan sensor) 120dB
Digital Noise Reduction (DNR)	2D, 3D
Highlight Compensation (HLC)	Yes
Back Light Compensation (BLC)	Yes
Reduction of image flicker (Antiflicker)	Yes
LENS	
Lens Type	Ø14
Point of view	Horizontal: 51° - 7° Vertical: 27° - 4° Diagonal: 60° - 8°
Focal length (zoom ratio)	Motorized lens, f=5 ~ 50mm/F1.6
Max. aperture ratio	F2.0
Minimum Object Distance	0.2m
DORI	Detection: 5mm 129.4m - 50mm 942.9m Observation: 5mm 51.4m - 50mm 374.2m Recognition: 5mm 25.9m - 50mm 188.6m Identification: 5mm 12.9m - 50mm 94.3m
DAY/NIGHT	
Switching Type	Mechanical IR cut filter
Switching Mode	Auto, manual, time
Switching Delay	1 ~ 36s
NETWORK	
Stream Resolution	Main Stream: 2880x1620, 2592 x 1520, 2304x1296, 1920x1080, 1280x960, 1280x720 Sub Stream: 1280x720, 640x480, 320x240 Mobile Stream: 640x480, 320x240


Frame Rate	30fps for each resolution
Multistreaming Mode	3 streams (main stream, sub stream & mobile stream)
Video/Audio Compression	H.264+, H.265+, H.264, H.265, MJPEG/G.711
Number of Simultaneous Connections	Max. 3 connections, (max. 40 streams in total)
Bandwidth	30Mb/s total
Video quality adjustment	256Kbps ~ 8Mbps
Bitrate-kontrollmetod	CBR/VBR
IP	IPv4/v6
Network Protocols Support	HTTP, TCP/IP, HTTPS, DHCP, DNS, DDNS, NTP, RTSP, RTP, SMTP, P2P
Security	Complex password; Authenticated username and password
Application programming interface	ONVIF (Profile S/G/T/M)
Camera Configuration	From Internet Explorer, Edge, Firefox, Chrome, Safari browser Languages: English and others
Compatible Software	SafeVision VMS
Mobile applications	RxCamView (iPhone, Android)
OTHER FUNCTIONS	
Privacy Zones	4 video mask type: single color
Motion Detection	Yes
AI Analytics	Face Detection/Recognition, AI Object Classification (Distinguishes Objects Such as Pedestrians and Vehicles) Perimeter Intrusion, Line Crossing, Cross Counting, Heat Map, Crowd Density, Queue Length, License Plate Detection/Recognition, Rare Sound Detection, Intrusion, Object Detection, Region Entrance, Region Exiting
Image setting	Full color mode, Day and night mode, Smart lighting
Image Processing	180° image rotation, vertical flip, horizontal flip
Prealarm/Postalarm	Up to 5s/up to 30s
System Reaction to Alarm Events	E-mail with attachment, saving file on SD card, active deterrent functions
Action in case of alarm	White LEDs, steady/flashing light, red and blue LEDs, flashing light, Audio signaling device (siren)
Restoring default settings	Via web browser, using reset button

License Plate Recognition (ANPR)	
Autonomous operation mode	Yes - recognition function implemented in the camera
Capacity of License Plate Database	Up to 10000 license plates, on all lists
Types of recognized number plates	All countries of the European Union
Data recorded in the camera base	Recognition date/time, number of recognised licence plate, image of recognised licence plate, presence on the "white list" or "black list"
Reactions for the licence plate recognition	E-mail with attachment, saving file on FTP server, saving a file in the cloud
IR LED	
LED Number	8pc
Range	80m
Smart IR	Yes (hardware support)
WHITE LIGHT ILLUMINATOR	
LED Number	4pc, warm white color
Range	30m
Smart Light	Yes (hardware support)
INTERFACES	
Alarm Input/Output	1 x Input, 1 x Output
Audio Input/Output	1 x Input, 1 x Output + Built-in microphone/speaker
Network Interface	1 x Ethernet - RJ-45 interface, 10/100Mbit/s
Memory Card Slot	MicroSD - capacity up to 256GB

INSTALLATION PARAMETERS

Dimensions (WxHxL)	With bracket & junction box: 96.8 x 94.1 x 335.8mm
Weight	1.66kg
Degree of Protection	IP67, IK10, NEMA 4X
Enclosure	Aluminium, white, fully cable managed wall mount bracket and junction box in-set included Enclosure type: NM
Power Supply	12VDC, PoE (IEEE 802.3af, Class 3)
Surge protection	TVS 4000V
Power Consumption	DC12V: max 8.7W PoE(48V): max 11.1W
Operating Temperature	-35°C ~ 60°C
Humidity	Max 90%, relative (non-condensing)

Dimensions

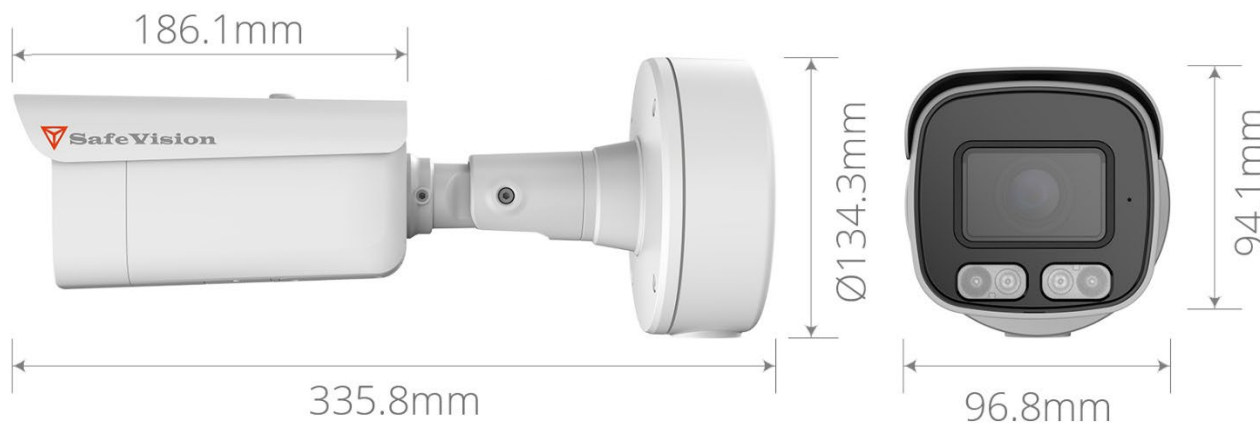

Matching Accessories

	
SV-CZJ-A	SV-PZJ-A