


SV-8DSE-SPAD/3015-28PW



8MP Dual Lens Panoramic Turret Camera With Deep Learning-based Image Analysis, Active Deterrence, Starlight Sensor, Dual Light, Object Verification, Face Detection, Sound Detection, License Plate Detection/Recognition, 2x2.8mm (180°) Fixed Lens, 30m IR, 15m LED, Built-in Microphone and Speaker.

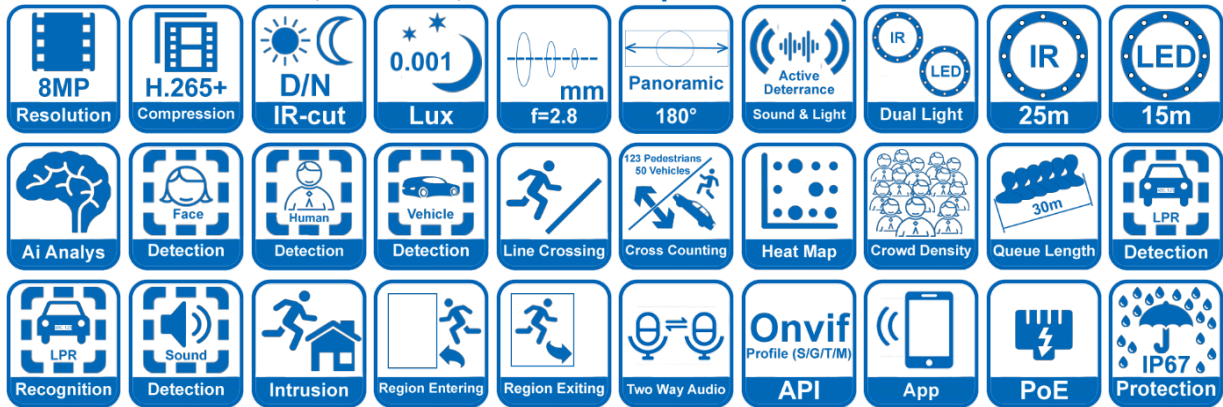

- Resolution: 8MP (4K Ultra HD 3840x2160).
- Lens: Fixed, f=2.0mm/F2.4 (180°).
- Starlight Sensor.
- Min. Illumination: 0.007lux (0lux, IR on).
- Dual Light Sources.
- IR LED, range up to 25m.
- White LED illuminator, range up to 15m.
- 24/7 All-weather Color Images.
- Audio & Light alarm, Active deterrence.
- Two-way audio.
- Built-in microphone.
- Built-in speaker.
- AI Analytics based on deep learning:
 - Face Detection, AI Object Classification (Distinguishes Objects Such as Pedestrians and Vehicles)
 - Perimeter Intrusion, Line Crossing, Cross Counting, Heat Map, Crowd Density, Queue Length, License Plate Detection/Recognition, Rare Sound Detection, Intrusion, Object Detection, Region Entrance, Region Exiting.
- Supports backlight compensation, strong light suppression, 3D digital noise reduction, suitable for different video environments.
- MicroSD card support (256Gb).
- **ONVIF** (Profile S/G/T/M).
- **IP67** Protection.
- Two way power - when connected to a PoE switch, it allows to power the low power receiver from the camera's power socket.

Specifications

IMAGE	
Image Sensor	8MP CMOS sensor 1/2.7" SmartSens x 2
Number of Effective Pixels	5120 (H) x 1440(V)
Min. Illumination	0.001lux/F1.2 -color mode 0lux (IR på) -B/W mode
Electronic Shutter	Auto/manual: 1/5s ~ 1/20000s
Digital Slow Shutter (DSS)	Up to 1/5s
Wide Dynamic Range (WDR)	Yes
Digital Noise Reduction (DNR)	3D
Highlight Compensation (HLC)	Yes
Back Light Compensation (BLC)	Yes
Reduction of image flicker (Antiflicker)	Yes
LENS	
Lens Type	2xM12
Point of view	Horizontal: 180° Vertical: 91° Diagonal: 180°
Focal length (zoom ratio)	Fixed lens, f=2.0mm/F1.2
Max. aperture ratio	F1.2
Minimum Object Distance	2m
DORI	Detection: 56m Observation: 22.4m Recognition: 11.2m Identification: 5.6m
DAY/NIGHT	
Switching Type	Mechanical IR cut filter
Switching Mode	Auto, manual, time
Switching Delay	1 ~ 36s
NETWORK	
Stream Resolution	Main Stream: 5120x1440, 4608x1296, 4096x1152, 3840x1080, 3072x864 Sub Stream: 1536x432, 1024x288
Frame Rate	15fps for each resolution
Multistreaming Mode	3 streams (main stream, sub stream & mobile stream)

Video/Audio Compression	H.264+, H.265+, H.264, H.265, MJPEG/G.711
Number of Simultaneous Connections	Max. 14 connections
Bandwidth	40Mb/s total
Video quality adjustment	256Kbps ~ 8192Kbps
Bitrate-kontrollmetod	CBR/VBR
IP	IPv4/v6
Network Protocols Support	HTTP, TCP/IP, IPv4/v6, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, RTP, UPnP, SNMP, IEEE 802.1X, PPPoE, SMTP, P2P, HTML5, RTMP
Security	Complex password; Authenticated username and password
Application programming interface	ONVIF (Profile S/G/T/M)
Camera Configuration	From Internet Explorer, Edge, Firefox, Chrome, Safari browser Languages: Swedish, English and others
Compatible Software	SafeVision VMS
Mobile applications	RxCamView (iPhone, Android)
OTHER FUNCTIONS	
Privacy Zones	6 video mask type: single color
Motion Detection	Yes
AI Analytics	Face Detection, AI Object Classification (Distinguishes Objects Such as Pedestrians and Vehicles) Perimeter Intrusion, Line Crossing, Cross Counting, Heat Map, Crowd Density, Queue Length, License Plate Detection/Recognition, Rare Sound Detection, Intrusion, Object Detection, Region Entrance, Region Exiting
Image setting	Full color mode, Day and night mode, Smart lighting
Image Processing	180° image rotation, vertical flip, horizontal flip
Prealarm/Postalarm	Up to 5s/up to 30s
System Reaction to Alarm Events	E-mail with attachment, saving file on SD card, active deterrent functions
Action in case of alarm	White LEDs, steady/flashing light, red and blue LEDs, flashing light, Audio signaling device (siren)
Restoring default settings	Via web browser, using reset button

License Plate Recognition (ANPR)

Autonomous operation mode	Yes - recognition function implemented in the camera
Capacity of License Plate Database	Up to 10000 license plates, on all lists
Types of recognized number plates	All countries of the European Union
Data recorded in the camera base	Recognition date/time, number of recognised licence plate, image of recognised licence plate, presence on the "white list" or "black list"
Reactions for the licence plate recognition	E-mail with attachment, saving file on FTP server, saving a file in the cloud
IR LED	
LED Number	3pc
Range	30m
Smart IR	Yes (hardware support)
WHITE LIGHT ILLUMINATOR	
LED Number	2pc, warm white color
Range	15m
Smart Light	Yes (hardware support)
INTERFACES	
Alarm Input/Output	-
Audio Input/Output	Built-in microphone/speaker
Network Interface	1 x Ethernet - RJ-45 interface, 10/100Mbit/s
Memory Card Slot	MicroSD - capacity up to 256GB

INSTALLATION PARAMETERS

Dimensions	Ø135 x 112.4mm
Weight	0.765kg
Degree of Protection	IP67
Enclosure	Aluminium, white Enclosure type: DSE
Power Supply	12VDC, PoE (IEEE 802.3af, Class 3)
Surge protection	TVS 4000V
Power Consumption	DC12V: max 10.7W PoE(48V): max 13.5W
Operating Temperature	-35°C ~ 60°C
Humidity	Max 90%, relative (non-condensing)

Dimensions



Matching Accessories

		
SV-BZJ-C-2	SV- CXH-A	SV- CXH-I
		
SV-CXH-SW02B	SV-CXH-J	SV-CXH-B