


SV-N1064QR-E4HL

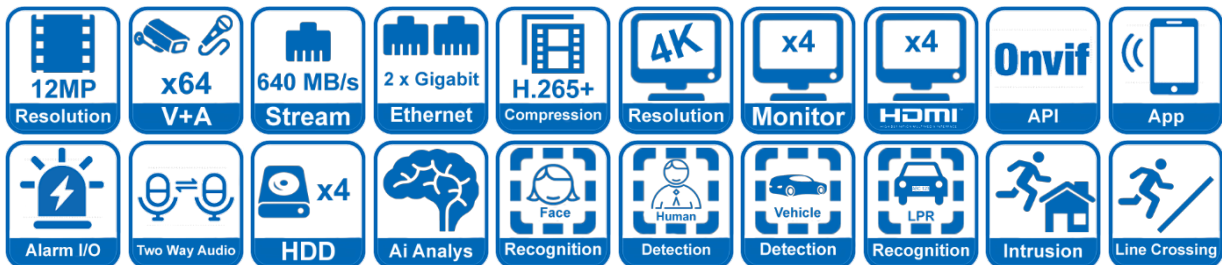


- Maximum support for 64 channels of 4K IP camera input.
- H.265 encoding and decoding.
- Supports standard ONVIF protocol.
- With 2 gigabit Ethernet ports.
- With 4 internal hard drive bays, up to 4x18TB.
- 16 alarm inputs and 1 alarm output.
- Supports intelligent analysis such as human detection, vehicle detection, license plate recognition, perimeter intrusion, and line violation statistics.
- Allows remote access from mobile devices and computers.
- Supports external alarm devices and has RCA interface for voice intercom.

Specifications

Video	
Input Bandwidth	640Mbps
Out Bandwidth	640Mbps
Performance	
Recording Resolution	12MP, 8MP, 5MP, 3MP, 2MP (1080P), 1.3MP (960P), 1.0MP (720P)
Recording Compression	Audio: G.711A, G.711U Video: H.264/H.265/H.264+/H.265+
Speed	12MP: 60fps 8MP: 240fps 4MP: 480fps 2MP: 960fps
Playback	1080P: 960fps Max 16CH playback
Network	
Remote Connection	Up to 32 users, each user up to 5 devices
WEB	IE10/11, Safari V12.1 above, Firefox V.52 above, Google chrome V.57 above, Edge V.79 above
Protocols	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, UPnP, HTTP, HTTPS
API	RS API/Onvif (profile S/G/T)
Voice command	Home Device: Google Assistant, Amazon Alexa
Interface	
P/W Reset	Yes

HDMI	3 (1024x768, 1280x720, 1280x1024, 1440*900, 1920x1080, 1920x1080, 1600x1200, 1920x1200, 3840x2160/7680*4320/EDID) Async out *If the output resolution of HDMI 1 is set to 8K, the maximum output resolution of HDMI 3 and 4 will be limited to 1080P, and HDMI 2 will be disabled.
	1 (1024x768, 1280x720, 1280x1024, 1440x900, 1920x1080 /EDID) Async out
Ethernet	2 RJ45 1000 Base-T
PoE	No
USB	1 USB2.0 (front) 2 USB3.0 (rear)
Audio	1 in / 1 out
E-sata	1
HDD	4 SATA HDD, up to 18TB
RS485	1
Alarm In/output	16 in / 1 out
General	
OSD Language	Swedish/English/French/Spanish/Portuguese/German/Italian/Greek/Danish/Finnish/ Russian/Hebrew/Turkish/Bulgarian/Arabic/Korean/Japanese/Thai/Hindi / Romanian/Dutch/Polish/Persian/Hungarian/Chinese/Ukrainian
Dimension (WxDxH)	378x326x66mm
Weight	≤ 2.3kg (without HDD)
Input Voltage/Current	12V/5A
Power consumption	9W (excluding hard disk)
Operating Temperature	-10°C~+50°C (14°F ~ 122°F)
Humidity	Less than 90%RH
FCC	Yes
CE	Yes

Physical Interface

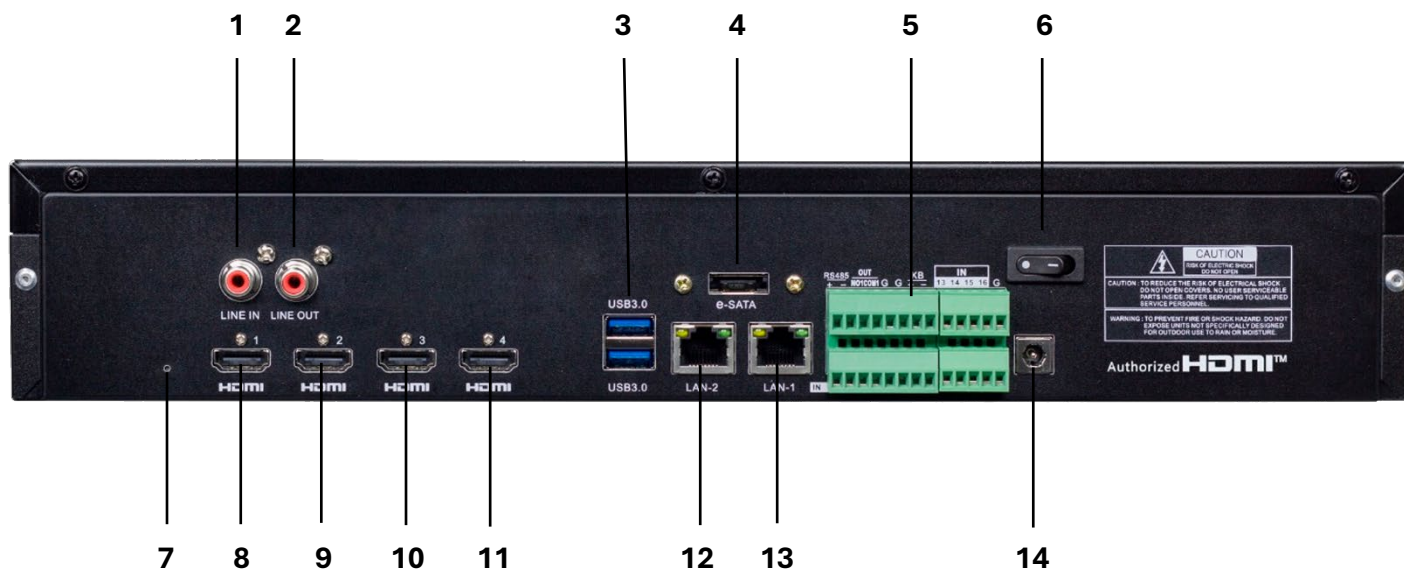

Nr.	Decription	Nr.	Decription
1	Audio IN	8	HDMI 1
2	Audio OUT	9	HDMI 2
3	USB 3.0	10	HDMI 3
4	e-SATA	11	HDMI 4
5	Sensor, alarm & RS485	12	LAN Port 2
6	Power Switch	13	LAN Port 1
7	Reset button	14	Power